



# Professional colour laser printer

with cost-effective, high-quality colour printing

# HL-L9430CDN



www.brother.co.za

# Professional colour laser printer

High-quality, cost-effective professional colour printing with premium results. Built for business, this device is designed to deliver a professional performance - with high-speed, glossy colour printing you can rely on with the flexibility to be tailored to suit you and your business

HL-L9430CDN



# **Key features:**

- Print up to 40 pages per minute
- 2-sided print, up to 28 sides per minute
- 8.76cm colour touchscreen LCD
- NFC (Near-Field Communication) for secure authentication and mobile print
- 1GB internal memory
- 520 sheet paper input tray expandable to 2600
- 9000 page (BK), 6500 page (C/M/Y) inbox toners<sup>1</sup>

# Simple. Effortless. Intelligent

The HL-L9430CDN comes with Cloud Secure Print as standard, so you can print securely without installing additional drivers or apps. You also have the option to further enhance your device with third party solutions, meaning that you can have a fully integrated print, capture and output management solution all from one provider.

# Flexibility that saves money

A wide range of professional finishing options are available for the HL-L9430CDN for optimal efficiency. If you need a mailbox to sort your printed documents, your printer can easily be transformed to help improve business productivity. Boost paper capacity with additional paper trays or Tower tray unit, transforming your HL-L9430CDN to a floor-standing printer.

# Secure by design

As working conditions change, security is more critical than ever. The HL-L9430CDN comes with enterprise level security, supporting the latest industry-standard security protocols to keep your data secure. You can further protect your device by setting up user authentication, whereby access to certain settings and functions are restricted to authorised users or groups.





# When quality and performance work together


Our most advanced colour printing technology is guaranteed to make the right impression when it counts, with vibrant, professional colour prints. The robust design and long-life components provide confidence that your device will keep on performing without interruption.

# Solutions ready

# **Streamlined business processes**

With the ever changing workplace, it's important to continuously review and refine the way your business operates. Utilising the right technology can redefine business processes and bring surprising benefits.

Cloud Secure Print is a convenient built-in feature which enables you to easily send documents to print when you're away from home or the office. Remotely submit the print request via email to a Brother device with an active internet connection and securely retrieve print jobs when you are ready. Documents will only be printed when the sender enters a unique password on the destination device's control panel.

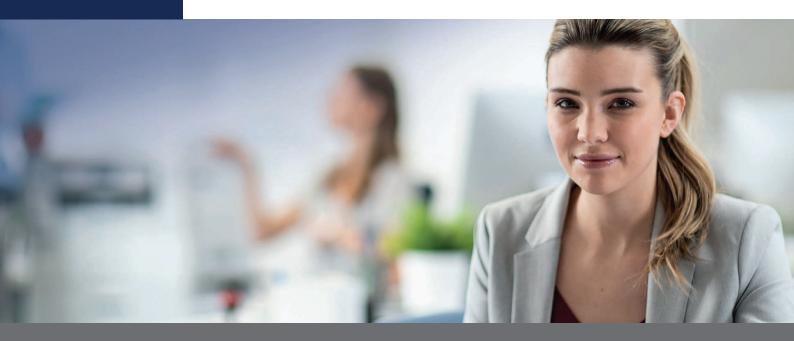

Unlock new possibilities with a range of business solutions Whether you already use print management software or would like to understand how it can improve efficiency and security within your business, we are here to help.

You have the option to upgrade your device with intelligent Brother and third-party solutions, including integration with industry leading providers Kofax, and YSoft. This gives you complete flexibility in how you manage, secure and control your documents.

We work closely with our software partners across print management and document capture to create tailored solutions for your specific requirements. When we partner with a software vendor, we ensure your HL-L9430CDN works even harder to meet your needs.



General

**Technology** Electrophotographic Laser

Laser Classification Class 1 Laser Product

**Memory** 1GB Internal

**Control panel** 8.76cm Colour Touchscreen LCD Local interface<sup>17</sup> Hi-Speed USB 2.0, USB 2.0 Host (Front | Rear)

Wired Network interface GigE (10Base-T/100Base-TX/1000Base-T)

Mobile Print Print from a mobile device to your Brother printer

# Wireless Network interface<sup>16</sup>

2.4GHz: IEEE 802.11b/g/n 5GHz: IEEE 802.11a/n (Infrastructure Mode), Vertical Pairing

#### Wi-Fi Direct<sup>™</sup>

Print wirelessly<sup>16</sup> without having to use a wireless access point (both automatic and manual methods supported)

#### Print

**Print Speed<sup>8</sup> (A4)** Up to 40ppm (pages per minute)

**Print Speed**<sup>8</sup> **2-Sided (A4)** Up to 28 sides per minute (14 sheets per minute)

**Resolution** 2,400dpi (2,400 x 600dpi), 600 x 600dpi

**FPOT<sup>9</sup>** (First Print out Time) Less than 10 seconds from ready mode and standard tray Warm up time Less than 20 seconds from sleep mode

Print languages PCL5e, PCL5c, PCL6, (PCL XL Class3.0), BR-Script3, PDF Version 1.7, XPS Version 1.0

**Embedded Fonts (PCL)** 73 scalable fonts, 12 bitmap fonts

Embedded Fonts (Postscript) 66 scalable fonts

# Embedded Barcodes (PCL)

16 bar codes fonts - Code39, Interleaved 2 of 5, FIM (US-PostNet), Post Net (US-PostNet), EAN-8, EAN-13, UPC-A, UPC-E, Codabar, ISBN(EAN), ISBN(UPC-E), Code128 (set A,B, C), EAN128 (set A,B,C), Code93, GS1Databar, MSI

## **Printer Functions**

#### N-up Printing<sup>3</sup>

Reduce up to 2, 4, 9 or 16 or 25 A4 pages into just one A4 page Mac (Airprint) up to 2, 4, 6, 9, or 16

#### **Booklet Printing**

Print documents in A5 booklet format using automatic or manual 2-sided print

#### **Poster Printing<sup>4</sup>**

Enlarge 1 A4 page into a poster using 4, 9, 16 or 25 A4 pages

#### Watermark Printing<sup>4</sup>

Watermark your documents with predefined or user-defined text

#### Print Profiles<sup>3</sup>

Store your favourite driver settings as profiles to easily recall them

#### Print text in black<sup>4</sup>

Converts all text in your documents to black when printed

#### Direct Print

Print directly from a USB flash memory drive. Supported formats include; PDF 1.7, JPEG, Exif+JPEG, PRN (created using printer driver of model), TIFF (scanned using brother model), XPS version 1.0

# Manual 2-Sided Print<sup>4</sup>

Manual 2-sided printing (recommended for media not supported by automatic 2-sided print)

#### **ID** Printing<sup>4</sup>

Add identification to your printed documents (date & time, short custom message or PC username)

#### Storage Print

Easily retrieve and print your documents all of which are AES 256 encrypted and held within an attached USB Flash memory storage drive up to 8GB (not included)

#### **Reverse Print<sup>4</sup>**

Rotate the content of a printed document by 180°

#### **Carbon Copy**<sup>4</sup>

Prints additional copies of the same document to paper taken from additional paper trays

#### **Print Complete Notice**

A printing notification can be set to go to your computer when printing

#### Match Media4/19

Assign an ID to a specifc tray to make the selection of different media types from a specific tray easier

#### Skip Tray<sup>19</sup>

Configues your paper tray selection to avoid specific trays/ media for regular printing

#### Job Separation<sup>19</sup>

Insert a different coloured piece of paper between different print jobs to separate them for easy identification.

#### Secure Print<sup>4</sup>

Protect print jobs with a 4 digit release code required at the device in order for them to be printed

# **Printer Driver**<sup>5</sup>

Windows<sup>18</sup> Windows 10/11 (Home|Pro|Education|Enterprise) (32 or 64 bit editions) Windows 8.1 (32 or 64 bit editions) Windows 7 SP1 (32 or 64 bit editions) Windows Server 2022, 2019, 2016, 2012R2, 2012, 2008R2 Windows Server 2008 SP2

(32 & 64 bit editions)

Macintosh<sup>21</sup> macOS 10.14.x or greater

Linux CUPS, LPD/LPRng (x86/x64 environment)

PCL Driver Generic PCL XL driver

#### PostScript Universal Printer Driver

Driver for Windows that enables you to print to any network or locally connected Brother laser printer that supports PostScript

#### ChromeOS<sup>23</sup>

Supports native ChromeOS printing

# **Paper Handling**

Paper Input<sup>2</sup> Standard (Tray 1) 520 Sheets

Multi Purpose Tray 100 Sheets, 15 Envelopes

Paper Output<sup>2</sup> 250 sheets face down 1 sheet face up (straight path)

#### Media Sizes Standard (Trav 1)

Letter, Legal, Executive, A4, A5, A5 (Long Edge), A6, B5(ISO), Folio, 16K (195 x 270mm)

Multi Purpose Tray Width: 76.2mm - 215.9mm Length: 127mm - 355.6mm Envelopes; C5, Com-10, DL, Monarch

#### **Optional (Trays 2-5)**

Letter, Legal, Executive, A4, A5, Mexico Legal, India Legal, Folio, 16K (195 x 270mm)

#### 2-Sided Print

A4, Letter, Legal, Mexico Legal, India Legal, Folio (Desired paper size can be selected manually)

Media Types Standard (Tray 1)

Thin Paper, Plain Paper, Thick Paper, Thicker Paper, Recycled Paper

#### Multi Purpose Tray

Thin Paper, Plain Paper, Thick Paper, Thicker Paper, Recycled Paper, Bond Paper, Label, Envelope, Env. Thin, Env. Thick, Glossy Paper<sup>20</sup>

**Optional (Trays 2-5)** Thin Paper, Plain Paper, Thick Paper, Recycled Paper

#### 2-Sided Print

Thin Paper, Plain Paper, Thick Paper, Thicker Paper, Recycled Paper, Glossy paper Media Weights Standard (Tray 1), Multi Purpose Tray 60 - 230gsm

**Optional (Trays 2-5)** 64 - 105gsm

#### **Optional Mailbox Sorter** 60 - 200gsm (with offset)

#### Paper Input / Output Sensors

Onscreen and optional email alert notifications when input trays are empty or running low or the output stack is full.

# Mobile and Web Connectivity

#### Apple AirPrint

Print most common file types from any AirPrint enabled application

# Brother Print Service Plugin<sup>5</sup>

Print from Android devices without a dedicated App

**Brother Mobile Connect** 

Print from a mobile device running iOS or Android operating system

#### Mopria

Print most common file types from Mopria supported Android devices

#### Web Connect<sup>10, 15</sup>

Without using a PC, download and print from Box, SharePoint Online, Dropbox, Evernote, OneDrive, Google Drive<sup>™</sup>, OneNote

Brother Apps<sup>10</sup> Cloud Secure Print

Fleet Management Tools<sup>5</sup>

#### **Unattended Installer**<sup>4</sup>

Ability to centrally deploy and customise our drivers and software

#### MSI Installer<sup>4</sup>

Modular installers that can be distributed through On-Premise Active Directory®

#### **BRAdmin**<sup>4</sup>

LAN/WAN management software

#### Embedded Web Server

Using the IP address or node name of your device, access via a web browser the web based print management software embedded onto the device using an encrypted password

#### Driver Deployment Wizard<sup>4</sup>

Easily create print drivers for hassle free deployment over your network

#### Mass Deployment Tool<sup>4</sup>

Provides a configuration interface to help manage and deploy device settings

Status Monitor<sup>4</sup>

Monitor the status of your machine from your computer

#### Brother iPrint&Scan

Simplified, one-touch shortcuts for easy desktop printing and device maintenance. Easily print or organise your files from your Windows PC or Apple Mac computer

#### **Brother Utilities**

Provides setup guides, manual, FAQ & troubleshooting and contact to Brother customer service

#### Easy Setup<sup>22</sup>

Simplfying the install process with easy access to the right drivers and software for the installation of your Brother machine for your PC

# **Network Security**

Wired Network Security SMTP-AUTH, SSL/TLS (IPPS, HTTPS, SMTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, Ipsec

#### IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/ Port9100, IPP/IPPS, FTP Server, TELNET Server, HTTP/HTTPS server, TFTP client and server, SMTP Client, SNMPv1/v2c/v3, ICMP, Web Services (Print), CIFS client, SNTP client, LDAP

#### IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, FTP Server, TELNET Server, HTTP/HTTPS server, TFTP client and server, SMTP Client, SNMPv1/v2c/v3, ICMPv6, Web Services (Print), CIFS Client, SNTP Client, LDAP

#### **IP Filter**

Restrict which network users can or cannot access the device over the network (IPv4 only)

#### Wireless Network Security<sup>11, 16</sup>

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/ AES), SMTP-AUTH, SSL/TLS (IPPS, HTTPS, SMTP), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

Wireless Setup Support<sup>16</sup> Wi-Fi Protected Setup (WPS)

**Display IP Address** 

The dynamic IP assigned to your device can be displayed on the home screen

# **Security Features**

#### E-mail Notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

#### E-mail Reports

Receive usage reports on a regular basis via e-mail

#### Automatic Intrusion Detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, in order to ensure the device remains secure.

#### **Digitally-signed Firmware**

The firmware for Brother Print devices is digitally signed and secure

#### On-Premise Active Directory/LDAP Authentication

Utilise existing infrastructure to restrict access to Brother devices using AD/LDAP. Staff can easily use their existing network login credentials to authenticate

#### Port-based Network Access Control (IEEE 802.1x)

Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

#### **Restrict network protocols**

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

#### Setting Lock

Secures access to the devices control panel by locking it

#### Secure Function Lock 3.0

Use a 4 digit pin or a password to identify and authenticate an individual or groups of users over a network. Allows access control with username for up to 200 users

#### **Cloud Secure Print<sup>10</sup>**

Enables password protected driverless print job release

#### **Store Print Log**

Allows the audit of a print log file saved to CIFS server. Record ID, type, name, user, date, time, page count for every print job

#### **Firmware Updates**

In addition to allowing automatic updates to the latest version the printer can be set to not receive older firmware versions to avoid downgrade by unauthorised user

## SysLog

Allows IT Admin to access a single application (SIEM tool) to get device status updates for audit purposes over Syslog

# Near-Field Communications (NFC) / Card Reader Support

#### Integrated NFC Reader

Supported NFC standards include: (ISO14443 Type A) MIFARE Standard/Plus/ Ultralight/Ultralight C/DESfire my-d move, Tag-it (ISO15693 Type B)

#### External NFC Card Reader Support

RFIDeas pcProx Enroll

- RDR-6081AKU
- RDR-6281AKU
- RDR-6381AKURDR-6E81AKU
- RDR-6E81AKU
  RDR-6H81AKU
- RFIDeas AIR ID Enroll
- RDR-7081AKU
- RDR-7581AKU
- RDR-7F81AKU Elatec
- TWN3 MIFARE
- TWN3 MIFARE NFC
- TWN3 Multi ISO
- TWN4 MIFARE NFC

(3rd party card readers require additional purchase. Other card readers supported if registered via the embedded web server)

### Developers

#### Brother Solutions

Interface (BSI) Create powerful cloud and on premise solutions directly integrating the advanced print, scan and security capabilities of Brother devices. For more information contact Brother International South Africa

## Warranty

5-Year On-Site Warranty

When you purchase a Brother printer and our genuine inks or toners, we'll support you every step of the way with our FREE 5-year warranty commitment. YOU DO NOT NEED TO REGISTER YOUR PRODUCT, our warranty is automatic when you purchase your Brother printer. To keep your Brother machine running in optimal condition we recommend using only Brother Genuine Consumables, this will ensure you automatically enjoy our exclusive 5-year warranty



Supplies<sup>1</sup>, Upgrades and Accessories **Inbox Toner** 1 x 9,000 pages (BK) 3 x 6,500 pages (C/M/Y)

#### Super High Yield Toner TN871XXL 1 x 15,000 pages (BK) 3 x 12,000 pages (C/M/Y)

#### **Drum Unit**

DR851CL Approx 100,000 pages at 3 pages per job

#### Belt

BU800CL Approx. 150,000 pages at 2 pages per job

# Waste Toner Box WT800CL

Approx 100,000 pages

#### **Carton Contents**

Printer, Inbox Toners, Drum, Belt, Waste Toner Box, Power Supply Cord, Quick Set-Up Guide, USB cable

#### Wi-Fi Module

NC-9000w Optional wireless network interface

#### **Optional Paper Trays<sup>2</sup>**

500 sheet tray LT-340CL 4 x 520 sheet tower tray TT-4000 Tower Tray Connector TC-4100 Maximum combinations of 2x LT-340CL, TT-4000 and TC-4100

#### Optional Finishing Options<sup>2</sup>

Mailbox MX-4000 100 sheets x 4 bins, convertible to 400 sheets x 2 bins

#### Dimensions and weights

Printer without Carton (WxDxH) 442 x 541 x 403mm - 29kg

**Printer with Carton** (WxDxH) 557 x 628.2 x 633.5mm -34.3kg

#### Optional Paper Trays (WxDxH)

500 sheet tray: 410 x 486 x133mm - 6.6Kg 4 x 520 sheet tower tray: 660 x 660 x 717.4mm - 46.6Kg Tower Tray Connector: 444 x 486 x 103mm - 5.9Kg

#### Finishing Options (WxDxH) 4 bin Mailbox: 367 x 416 x 381mm - 4.4Kg

**Duty Cycle** 

**Recommended Monthly** Up to 12,000 pages monthly

print volume

# Environment

#### **Power Requirement**

220-240V AC 50/60Hz

#### Power Consumption<sup>12</sup>

Printing - 770W (420W in quiet mode) Ready 85W Sleep 15.6W Deep Sleep 1W Power Off 0.04W

#### Sound Pressure<sup>13</sup>

Printing 56.5dbA Ready 17.2dbA Quiet Mode 53dbA

#### Sound Power<sup>14</sup>

Printing 6.88BA Ready 3.02BA Quiet Mode 6.68BA

# TEC Value

0.662kWh / Week

#### **Operating Environment**

Humidity 20 - 80% 10°C - 32°C 50°F - 90°F

#### **Storage Environment**

Humidity 10 - 90% 0°C - 40°C 32°F - 104°F

# Disk Space Requirements

50MB - Windows Drivers Only 1.6GB - Windows 11, 10, 8.1, 7 All applications inc Drivers macOS - 500MB All applications

- 1 Approx declared toner yield value in accordance with ISO/IEC 19798
- 2 Calculated with 80gsm sheets of paper
- 3 Windows and macOS
- 4 Windows only
- 5 Free download from the Brother Solutions Centre http://solutions.brother.com
- 6 Number of printed pages per month can be used to compare designed durability between Brother products. For maximum printer life, it is best to choose a printer with a duty cycle that exceeds your print requirements
- 7 Requires Brother Software
- 8 Based on ISO/IEC 24734
- 9 Based on ISO/IEC 17629
- 10 Requires an Internet connection
- 11 Wi-Fi Direct supports WPA2-PSK (AES) only
- 12 All values are approximate; power consumption varies depending on the usage environment or part wear
- 13 Based on ISO 7779
- 14 Based on RAL-UZ171
- 15 Requires additional activation
- 16 Optional Wireless module required, 5GHz may not be available in your region
- 17 Third Party USB hubs not supported
- 18 Win7 / Server2008 SP2/R2 Extended Security Update (ESU) legacy support until 10/01/2023
- 19 Requires installation of optional trays
- 20 Set only a single sheet
- 21 On macOS AirPrint only
- 22 For more information visit https://setup.brother.com



#### Brother International South Africa

96 Sovereign Drive, Route 21 Corporate Park, Irene Tel 0861 brother Email info@brother.co.za www.brother.co.za https://support.brother.com/







Brother strongly recommends the use of genuine Brother consumable products only. Benefits include better quality print, greater yields per consumable protection of your machine from damages and achievement of optimum performance. As a precaution, please note that your machine warranty may not cover any damages arising from the use of non-genuine consumables.

All specifications correct at time of publication and are subject to change without notice. Brother and its logo are trademarks of Brother Industries LTD., Japan. All registered trademarks referenced herein are the property of their respective companies.