



Professional workgroup all-in-one colour laser printer with cost-effective, high-quality colour printing

MFC-L9630CDN



PRINT



COPY



SCAN



FAX

www.brother.co.za



Professional workgroup all-in-one colour laser printer

Professional level all-in-one laser printer. Easily customise and automate complex workflows. The impressive colour outputs combined with robust build quality and excellent paper handling options makes the MFC-L9630CDN the perfect choice for businesses.

MFC-L9630CDN



Key features:

- Print up to 40 pages per minute
- Print up to 12,000 pages per month
- 2-sided print, up to 28 sides per minute
- 2-sided scan up to 100 images per minute colour and mono
- 17.6cm colour touchscreen LCD
- NFC (Near-Field Communication) for secure authentication, mobile print and scan
- 2GB internal memory
- 100 sheet automatic document feeder (ADF)
- 520 sheet paper input tray, expandable to 2,600 sheets
- 9,000 page (BK), 6,500 page (C/M/Y) inbox toners¹

Simple. Effortless. Intelligent

The MFC-L9630CDN comes with Cloud Secure Print as standard, so you can print securely without installing additional drivers or apps. You also have the option to further enhance your device with third-party solutions, meaning that you can have a fully integrated print, capture and output management solution all from one provider.

Secure by design

To support the ever-evolving increased legislation on privacy and data security, the MFC-L9630CDN has built-in support for the latest industry-standard security protocols to keep your data secure. Identity management and access controls help to reduce risk with selective user restriction and allows authorised employees or groups to get instant access to specific settings and functions they need.

When quality and performance work together

Our most advanced colour printing technology is guaranteed to make the right impression when it counts, with vibrant, professional colour prints and accurate digital documents. The robust design, upgraded memory and long-life components provide confidence that your device will keep on performing without interruption.



Secure by design

As working conditions change, security is more critical than ever. That's why each single function printer and all-in-one comes equipped with a range of features that deliver enterprise level security.

To safeguard data against loss or theft, Transport Layer Security (TLS), Secure Socket Layer (SSL), IPsec and Scan to SSH Server (SFTP) are supported so that your most confidential files transfer using up to 256-bit encryption during transmission over the network. Using automatic intrusion detection, devices recognise abnormal activity and take preventative measures in order to ensure the printer remains secure.

Plus, identity management and access control help to reduce risk with selective user restriction, only allowing authorised employees or groups to get instant access to specific settings and functions they need.


Engineered for Performance

The robust design, upgraded memory and long-life components provides confidence your printer keeps on performing without interruption.

With fastest in class 2-sided scanning speeds of up to 100 ipm, physical documents are easily transformed into digital files with precision clarity.

Twin laser technology enables productivity to be greatly improved. With a first print out time of less than 10 seconds and a duplex print speed of up to 28 pages per minute, you are never kept waiting for that important document.

Model Number	Parts Life
Engine Life	400k pages
Fuser Unit	200k pages
Drum Unit	100k (Auto Reset)
Belt Unit	150k pages
Waste Toner Box	100k pages

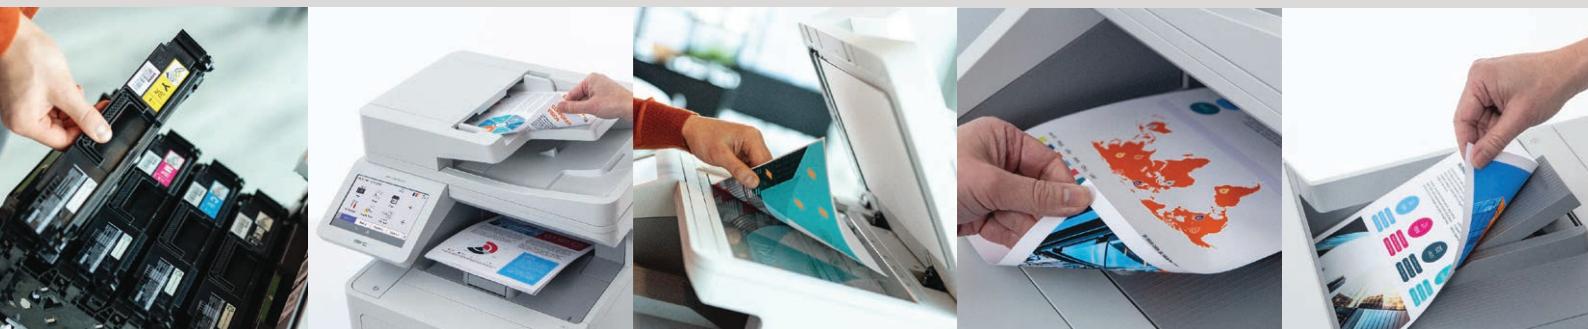

General

Technology

Electrophotographic laser

Laser Classification

Class one laser product

Memory

2GB internal

Control Panel

17.6cm colour
touchscreen LCD

Local Interface¹⁹

Hi-Speed USB 2.0, USB 2.0
host (front | rear)

Wired Network Interface

GigE (10Base-T/100Base-
TX/1000Base-T)

Mobile Print

Print from a mobile device to
your Brother printer

Fax Interface

Telephone line port
External telephone answering
Device port (TAD)

Configurable Shortcuts

Add, delete, change up to 64
personalised shortcuts for quick
and secure access to device
functions

Wireless Network (optional)

2.4GHz Support

Wi-Fi Direct™

Print wirelessly¹⁶ without having
to use a wireless access point
(both automatic and manual
methods supported)

Print

Print Speed⁸ (A4)

Up to 40ppm

Print Speed⁸ 2-sided (A4)

Up to 28 spm
(14 sheets per minute)

Resolution

2400dpi (2400 x 600dpi),
600 x 600dpi

First Print Out Time⁹

Less than 10 seconds from
ready mode

Warm Up Time

Less than 20 seconds from
sleep mode

Print Languages

PCL5e, PCL5c, PCL6,
(PCL XL Class3.0), BR-Script3,
PDF Version 1.7, XPS Version 1.0

Embedded Fonts (PCL)

73 scalable fonts,
12 bitmap fonts

Embedded Fonts (Postscript)

66 scalable fonts

Embedded Barcodes (PCL)

16 bar codes fonts - Code39,
Interleaved 2 of 5, FIM
(US-PostNet), Post Net
(US-PostNet), EAN-8, EAN-13,
UPC-A, UPC-E, Codabar,
ISBN(EAN), ISBN(UPC-E),
Code128 (set A,B, C),
EAN128 (set A,B,C), Code93,
GS1Databar, MSI

Printer Driver⁵

Windows²⁰

Windows 10/11
(Home|Pro|Education|Enterprise)
(32 or 64 bit editions)
Windows 8.1
(32 or 64 bit editions)
Windows 7 SP1
(32 or 64 bit editions)
Windows Server
2022, 2019, 2016, 2012R2,
2012, 2008R2
Windows Server 2008 SP2
(32 & 64 bit editions)

Macintosh²³

macOS 10.14.x or greater

Linux

CUPS, LPD/LPRng
(x86/x64 environment)

PCL Driver

Generic PCL XL driver

PostScript Universal Printer Driver

Driver for Windows that enables
you to print to any network or
locally connected Brother laser
printer that supports PostScript

ChromeOS²⁶

Supports native
ChromeOS printing

Printer functions

N-up Printing³

Reduce up to 2, 4, 9, 16 or 25 A4 pages into just one A4 page
Mac (Airprint) up to 2, 4, 6, 9, or 16

Booklet Printing

Print documents in A5 booklet format using automatic or manual 2-sided print

Poster Printing⁴

Enlarge one A4 page into a poster using 4, 9, 16 or 25 A4 pages

Watermark Printing⁴

Watermark your documents with predefined or user-defined text

Print Profiles³

Store your favourite driver settings as profiles to easily recall them

Print Text in Black⁴

Converts all text in your documents to black when printed

Direct Print

Print directly from a USB flash memory drive. Supported formats include; PDF 1.7, JPEG, Exif+JPEG, PRN (created using printer driver of model), TIFF (scanned using brother model), XPS version 1.0

Manual 2-sided Print⁴

Manual 2-sided printing (recommended for media not supported by automatic 2-sided print)

ID Printing⁴

Add identification to your printed documents (date and time, short custom message or PC username)

Storage Print

Easily retrieve and print your documents all of which are AES 256 encrypted and held within an attached USB Flash memory storage drive up to 8GB (not included)

Reverse Print⁴

Rotate the content of a printed document by 180°

Carbon Copy⁴

Prints additional copies of the same document to paper taken from additional paper trays

Print Complete Notice

A printing notification can be set to go to your computer when printing

Match Media^{4/21}

Assign an ID to a specific tray to make the selection of different media types from a specific tray easier

Skip Tray²¹

Configures your paper tray selection to avoid specific trays/media for regular printing

Job Separation²¹

Insert a different coloured piece of paper between different print jobs to separate them for easy identification

Secure Print⁴

Protect print jobs with a four digit release code required at the device in order for them to be printed

Mobile and web connectivity

Brother Mobile Connect

Use a Brother app to print from and scan to a mobile device running iOS or Android operating system

Apple AirPrint

Print most common file types from any AirPrint enabled application

Mopria

Print most common file types from Mopria supported Android devices

Brother Print Service plugin⁵

Print from Android devices without a dedicated App

Brother Apps¹²

Cloud Secure Print
Scan to - mobile, Searchable PDF, Microsoft Powerpoint, Word, Excel, Easy Scan to email, and Fax Forward to Cloud/Email

Web Connect^{12,17}

Without using a PC you can download to print and upload from scan and fax for Box, SharePoint Online, Dropbox, Evernote, OneDrive, Google Drive™, OneNote

Paper Handling

Paper Input²

Standard (tray 1)

520 sheets

Multipurpose Tray

100 sheets, 15 envelopes

Automatic Document Feeder

100 sheets

Paper Output²

250 sheets face down

one sheet face up (straight path)

Media Sizes

Standard (tray 1)

Letter, legal, executive, A4, A5, A5(long edge), A6, B5(ISO), Folio, 16K(195x270mm)

Multipurpose Tray

Width: 76.2mm-215.9mm

Length: 127mm-355.6mm

Envelopes; C5, Com-10, DL, Monarch

Optional (trays 2-5)

Letter, legal, executive, A4, A5, Mexico legal, India legal, Folio, 16K (195 x 270mm)

2-sided Print

A4, letter, legal, Mexico legal, India legal, Folio
(Desired paper size can be selected manually)

Media Types

Standard (tray 1)

Thin paper, plain paper, thick paper, thicker paper, recycled paper

Multipurpose Tray

Thin paper, plain paper, thick paper, thicker paper, recycled paper, bond paper, label, envelope, env. thin, env. thick, glossy paper

Optional (trays 2-5)

Thin paper, plain paper, thick paper, recycled paper

2-sided Print

Thin paper, plain paper, thick paper, thicker paper, recycled paper, glossy paper

Media Weights

Standard (tray 1), Multipurpose Tray

60-230gsm

Automatic Document Feeder (ADF)

45-120gsm

Optional (trays 2-5)

64-105gsm

Paper Input / Output Sensors

Onscreen and optional email alert notifications when input trays are empty or running low or the output stack is full.

Connectivity

Wired Network

Gigabit Ethernet (10Base-T/100Base-TX/1000Base-T)

Optional Wireless Network Card¹⁸

2.4GHz: IEEE 802.11 b/g/n

(Infrastructure Mode)

IEEE 802.11 g/n (Wi-Fi Direct)

(Optional NC-9000W)

Wi-Fi Direct^{®18}

Print wirelessly without having to go through a wireless access point (both automatic and manual methods supported)

Wireless Setup Support¹⁸

Wi-Fi Protected Setup (WPS)

Wireless Applications¹⁸

Vertical Pairing

Mobile

Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

Local Interface

Hi-Speed USB 2.0, USB 2.0 Host (Rear)

Software⁵

Brother iPrint&Scan

Simplified, one-touch shortcuts for easy desktop scanning, printing and device maintenance. Easily scan and organise your files from your Windows PC or Apple Mac computer

PaperPort SE 14⁴

Document management and sharing program from KOFAX

Utilities

Provides setup guides, manual, FAQ, troubleshooting & contact to Brother customer service

Easy Setup²⁵

Simplifying the install process with easy access to the right drivers and software for the installation of your Brother machine for your PC

Copy

Copy Speed (A4)¹⁰

Up to 40 cpm

First Copy Out Time¹⁰

12 seconds mono, 13 seconds colour from ready mode

Resolution

Up to 600 x 600dpi

Copy Interrupt

You can configure the machine to interrupt a print job in progress at any time to print another copy function job

Multi-Copying

Makes up to 999 copies of each page

Greyscale

256 shades of grey (8 bit)

Enlargement/Reduction Ratio

Reduce or increase document sizes from 25% to 400% in 1% increments

2 in 1 ID Copying

Allows the user to copy both sides of an ID card to a single A4 sheet

Scan

Scanner Type

Dual contact image sensor

Optical Scan Resolution

Up to 600 x 600dpi

Colour Depth

30 bit colour processing (input)
24 bit colour processing (output)

Scan Speed Standard (A4) Colour and Mono (2-sided)¹¹

Up to 100 ipm

Interpolated scan resolution²⁴

Up to 19,200 x 19,200dpi

Greyscale

256 levels (8 bit)

Scanner Drivers⁵

Windows²⁰

TWAIN & WIA
Windows 10/11
(Home|Pro|Education|Enterprise)
(32 or 64 bit editions)
Windows 8.1
(32 or 64 bit editions)
Windows 7
(32 or 64 bit editions)
Windows Server
2022, 2019, 2016, 2012R2,
2012 & 2008R2
Windows Server 2008
(32 & 64 bit editions)

Macintosh²³

AirPrint scanning
macOS 10.14.x or greater

Linux

SANE (32 and 64 bit editions)

Scanner Functions

Supported File Formats

Including PDF (PDF/A-1b, Secure PDF, Signed PDF, Searchable⁷) JPEG, TIFF, XPS

Standard Functions⁷

Scan to USB, E-mail, OCR, image and file

Network Scanning

Scan to network folder (SMB)⁴, FTP, SFTP, email server, SharePoint (On Premise)

Direct Scan

Scan directly to a USB flash memory storage

Scan Features

Auto deskew from ADF, rotate image⁴, background processing⁴, colour drop⁴, character correction^{4,7}, edge emphasis⁴, reduce noise⁴, edge fill^{4,7}, skip blank page, split and multi page PDF

Scan Profile³

Create up to 25 preset network, SFTP/FTP profiles for an easy way to store multiple scan settings

Document Separation

Create scanned files based on blank sheet separation or a specific number of single sided images or sheets of paper, even if more documents are set on the ADF

Fax

Fax Modem

33,600bps (Super G3)

Automatic 2-sided Faxing

Yes

PC-Fax Send⁷ and Receive^{4,7}

Send and receive black and white faxes directly from your PC

Internet Fax (i-fax)

Fax documents over the internet as an email attachment

Fax to Server

Scan a document and send it over the network to a separate fax server

Automatic Redial

Automatic redialling if the recipient fax is busy

Memory Transmission | Out of Paper Reception

Up to 500 pages (ITU-T test chart, standard resolution, JBIG)

Telephone Index

An electronic, alphabetical listing of stored speed dials and group numbers

Chain Dialling

Allows the user to store parts for long dialling sequences in different speed dial locations

Error Correction Mode (ECM)

Detect line errors during fax transmission and resend the page(s) of the document that had an error (recipient machines must share this feature for it to work)

Batch Transmission

Stores documents for the same location in the machines memo for transmission in a single call

Auto Reduction

When receiving a single page document longer than A4 (297mm) the fax machine will automatically reduce the message to fit onto a single A4 sheet

Broadcasting

Send the same fax message up to 299 locations (manual 50 locations)

Greyscale

256 shades (8 bit) of grey are available for faxing

Fax Forwarding

Sends a fax received in memory to another pre-programmed fax number

Remote Retrieval

Allows users to remotely access their machine and retrieve stored fax messages

Fax Stamp

Add the date and time to all received faxes

Cover Page

Create custom cover pages for outgoing faxes

Station ID

An ID and fax number will be printed as the header of every fax sent

Fleet Management Tools⁵

Unattended Installer⁴

Ability to centrally deploy and customise our drivers and software

MSI Installer⁴

Modular installers that can be distributed through On-Premise Active Directory[®]

BRAdmin⁴

LAN/WAN management software

Embedded Web Server

Using the IP address or node name of your device access via a web browser to the web based print management software embedded onto the device using an encrypted password

Driver Deployment Wizard⁴

Easily create print drivers for hassle free deployment over your network

Mass Deployment Tool⁴

Provides a configuration interface to help manage and deploy device settings

Status Monitor⁴

Monitor the status of your machine from your computer

Network Security

Wired Network Security

APOP, SMTP-AUTH, SSL/TLS (IPPS, HTTPS, SMTP), SNMP v3, 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, Ipsec

IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, POP3, SMTP Client, IPP/IPPS, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/Scan), SMTP Client, LDAP, IMAP4

IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, POP3, SMTP Client, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMPv6, SMTP Client, LDAP, Web Services (Print/Scan), IMAP4

IP Filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

Wireless Network Security^{13, 18}

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES), SMTP-AUTH, SSL/TLS (IPPS, HTTPS, SMTP), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

Wireless Setup Support¹⁸

Wi-Fi Protected Setup (WPS)

Display IP Address

The dynamic IP assigned to your device can be displayed on the home screen

Security Features

E-mail Notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

E-mail Reports

Receive usage reports on a regular basis via e-mail

Automatic Intrusion Detection

All Brother print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

Firmware Updates

In addition to allowing automatic updates to the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

Cloud Secure Print¹²

Enables password protected driverless print job release

On-premise Active Directory/LDAP Authentication

Utilise existing infrastructure to restrict access to Brother devices using AD/LDAP. Staff can easily use their existing network login credentials to authenticate

Port-based Network Access Control

(IEEE 802.1x)
Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (extensible authentication protocol) protected network

Restrict Network Protocols

The Protocol control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

Store Print Log

Allows audit of a print log file saved to CIFS server. Record ID, type, name, user, date, time, page count for every print job

Setting Lock

Secures access to the devices control panel by locking it

Secure Key Management

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public certificate & private key for protected network communication

Secure Function Lock 3.0

Use a 4 digit pin or a password to identify and authenticate an individual or groups of users over a network. Allows access control for up to 200 users

Digitally-signed Firmware

The firmware for Brother print and scan devices is digitally signed and secure

Syslog

Allows IT Admin to access a single application (SIEM tool) to get device status updates for audit purposes over Syslog

Near-Field Communications (NFC) / Card Reader Support*

Integrated NFC Reader
Supported NFC standards include: (ISO14443 Type A) MIFARE Standard/Plus/Ultralight/Ultralight C/DESfire my-d move, Tag-it (ISO15693 Type B)

External NFC Card Reader Support
RFIDeas pcProx Enroll

- RDR-6081AKU
- RDR-6281AKU
- RDR-6381AKU
- RDR-6E81AKU
- RDR-6H81AKU

RFIDeas AIR ID Enroll

- RDR-7081AKU
- RDR-7581AKU
- RDR-7F81AKU

Elatec

- TWN3 MIFARE
- TWN3 MIFARE NFC
- TWN3 Multi ISO
- TWN4 MIFARE NFC

(3rd party card readers require additional purchase. Other card readers supported if registered via the embedded web server)

* Not supplied by Brother International

Address Book

Speed Dials
300 locations for e-mail addresses and fax numbers

Group Dial
A combination of up to 20 groups can be stored for broadcasting

LDAP
The ability to connect to an external LDAP enabled address book, like Microsoft Exchange

Developers

Brother Solutions Interface (BSI)
Create powerful cloud and on premise solutions directly integrating the advance print, scan and security capabilities of Brother devices.

Warranty

Brother 3 Year Warranty
Your Brother printer comes with a FREE 3-year warranty — no registration required. To maintain optimal performance and warranty coverage, we recommend always using Brother Genuine Consumables.



Duty Cycle

Recommended Monthly
Up to 12,000 pages monthly print volume

Supplies and Consumables

Inbox Toners

9,000 pages (BK)
6,500 pages (C/M/Y)

Replacement Toners

TN874BKP
15,000 pages (BK)
TN874CP/MP/YP
12,000 pages (C/M/Y)

Belt

BU800CL
Approx. 150,000 pages at
two pages per job

Waste Toner

WT800CL
Approx 100,000 pages

Drum Unit

DR871CLP
Approx 100,000 pages at
three pages per job

Carton Contents

Printer, inbox toners, drum,
belt, waste toner box, power
supply cord, quick set-up
guide, USB cable

Optional Accessories

Paper Trays²

LT-340CL 500 sheet tray

Tower Tray

TT-4000 4 x 520 sheet tower tray
TC-4100 Tower tray connector

Maximum combinations of
2 x LT-340CL or TT-4000
and TC-4100

Wi-Fi Module

NC9000W
Optional wireless network
interface

Dimensions and Weights

Printer without carton (WxDxH)

503 x 541 x 586mm - 36.5kg

Printer with carton (WxDxH)

580 x 663.7 x 734mm - 42.7kg

Optional paper trays (WxDxH)

500 sheet tray:
410 x 486 x 133mm - 6.6kg
4 x 520 sheet tower tray:
660 x 660 x 717.4mm - 46.6kg
Tower tray connector:
444 x 486 x 103mm - 5.9kg

Environment

Power Requirement

220-240V
AC 50/60Hz

Power Consumption¹⁴

Printing: 770W
(430W in quiet mode)
Copying: 730W (420W in quiet
mode)
Ready: 85W
Sleep: 16.8W
Deep sleep: 1.1W
Power Off: 0.04W

TEC Value

0.687kWh / week

Sound Pressure¹⁵

Printing: 56.5dbA
Ready: 17.2dbA
Quiet mode: 53dbA

Sound Power¹⁶

Printing: 6.79BA
Ready: 3.06BA
Quiet mode: 6.68BA
Deep sleep: 3.06BA

Operating Environment

Humidity 20-80 %
10°C-32°C
50°F-90°F

Storage Environment

Humidity 10-90 %
0°C-40°C
32°F-104°F

Disk Space Requirements

50MB - Windows drivers only
1.6GB - Windows 11, 10, 8.1, 7
All applications inc drivers
macOS - 500MB all applications

- 1 Approx declared toner yield value in accordance with ISO/IEC 19798
- 2 Calculated with 80gsm sheets of paper
- 3 Windows & macOS
- 4 Windows only
- 5 Free download from the Brother Solutions Centre <http://solutions.brother.com>
- 6 Number of printed pages per month can be used to compare designed durability between Brother products
For maximum printer life, it is best to choose a printer with a duty cycle that exceeds your print requirements
- 7 Requires Brother Software
- 8 Based on ISO/IEC 24734
- 9 Based on ISO/IEC 17629
- 10 Based on ISO/IEC 24735
- 11 Based on ISO/IEC 17991
- 12 Requires an Internet connection
- 13 Wi-Fi Direct supports WPA2-PSK (AES) only
- 14 All values are approximate; power consumption varies depending on the usage environment or part wear
- 15 Based on ISO 7779
- 16 Based on RAL-UZ171
- 17 Requires additional activation
- 18 Optional Wireless Network Card required (NC-9000W)
- 19 Third Party USB hubs not supported
- 20 Win7 / Server2008 SP2/R2 Extended Security Update (ESU) legacy support until 10/01/2023
- 21 Requires installation of optional trays
- 22 Set only a single sheet
- 23 On macOS AirPrint only
- 24 For WIA, 1200x1200 resolution. Brother Scanner Utility enables to enhance up to 19200 x 19200 dpi
- 25 For more information visit <https://setup.brother.com>

brother
at your side



Brother International South Africa
96 Sovereign Drive, Route 21 Corporate Park, Irene
Tel 0861 brother Email info@brother.co.za
www.brother.co.za <https://support.brother.com/>



All specifications correct at time of publication and are subject to change without notice. Brother and its logo are trademarks of Brother Industries LTD., Japan.
All registered trademarks referenced herein are the property of their respective companies.

 **BROTHER
CREATIVECENTRE**



Working with you for a better environment
www.brotherearth.com